


PRODUCT INFORMATION

DIAPHRAGM MATERIAL & THIN GAUGE SHEET RUBBER

J-Flex the U.K.'s leading independent stockist & supplier of Technical Sheet Rubber Products offer a wide range of specialised stock items including :-

- ◆ Precisely coated rubberised diaphragm materials
- ◆ Thin gauge tight tolerance sheet rubber
- ◆ Elastomeric films

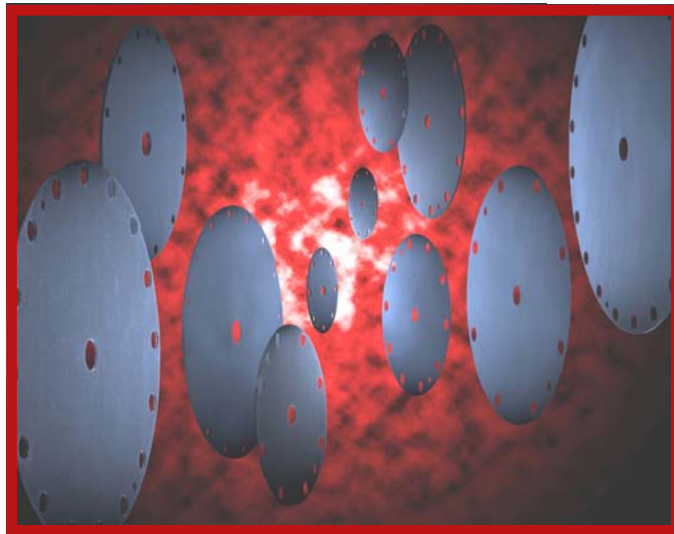

Our huge range of stock and custom made sheet products includes - Nitrile / Nylon and Neoprene / Nylon Diaphragm Materials; Thin Gauge Neoprene; Nitrile; EPDM; Latex; Silicone; Viton™ / FKM and Polyurethane.

Sourced from the World's leading producers, these precision tolerance items enable OEM designers and manufacturers to produce leak-proof components and assemblies in many exacting applications including :-

- Vintage and cherished vehicle carburettors
- L.P.G. / C.N.G. / Methane gas valve / control equipment
- Pharmaceutical closures
- Breathing masks / safety protection equipment
- Industrial pumps
- Diesel and other fuel pumps
- Flexible sleeves and connectors

Contact us today with your specific Technical Sheet Rubber requirements.
You're in safe hands with J-Flex.



J-FLEX

High Performance Elastomer Sheetings & Manufactured Components

Units 1 & 2, London Road Business Park, Retford,
Nottinghamshire, DN22 6HG, United Kingdom

tel: +44 (0) 1777 712 400 fax: +44 (0) 1777 712 409
www.j-flex.co.uk



MATERIAL / THICKNESS CAPABILITY

MATERIAL / QUALITY NO.	THICKNESS
NITRILE / NYLON DIAPHRAGM SHEET	
TX1B1N4020 - Nitrile (NBR) / Nylon 210 - Black	0.20mm(+/-0.02)
TX1B1N4030 - Nitrile (NBR) / Nylon 210 - Black	0.30mm(+/-0.03)
TX1B1N4040 - NBR613 / Nylon 210 - Black	0.40mm(+/-0.04)
TX1B1N4050 - NBR618 / Nylon 210 - Black	0.50mm(+/-0.05)
TX1B1N4065 - Nitrile (NBR) / Nylon - Black	0.65mm(+/-0.07)
TX1B1N4080 - NBR618 / Nylon 210 - Black	0.80mm(+/-0.08)
TX1B1N4100 - NBR618 / Nylon 210 - Black	1.00mm(+/-0.10)
TX1B1N4150 - NBR618 / Nylon 210 - Black	1.50mm(+/-0.15)
TX1B1N4200 - NBR618 / Nylon 210 - Black	2.00mm(+/-0.20)
NEOPRENE / NYLON DIAPHRAGM SHEET	
TX5M4N4300 - Neoprene (CR) / 2 Ply Nylon - Black	3.00mm(+0.30 /-0.10)
THIN GAUGE TIGHT TOLERANCE SHEET RUBBER	
60° Shore Neoprene	0.5mm (+/-0.08)
70° Shore General Purpose Nitrile	0.5mm (+/-0.08) & 0.8mm (+/-0.10)
60° Shore EPDM	0.5mm (+/-0.1)
75° Shore Viton™ / FKM	0.25mm & 0.50mm
60° Shore FDA Silicone	0.3mm, 0.5mm & 0.8mm
40° Shore FDA Silicone	0.5mm & 0.8mm
35° Shore Latex FDA Grade	0.2mm to 0.5mm
FDA / Atex Approved P.U. Film	0.1mm, 0.35mm, 0.6mm, 1.0mm & 1.50mm
REINFORCED SPECIALITY SHEETING'S	
Red Silicone / 1 Ply Glassfabric Insertion	1.5mm, 2.0mm, 3.0mm & upwards
Translucent FDA Silicone / 1 Ply Polyester Insertion	1.0mm
FKM + 1 Ply Nomex Insertion	1.5mm, 2.0mm, 3.0mm & upwards