


## Self-Adhesive Backing (double sided tape) used on Silicone Sheets & Strips

The adhesive is a modified polyacrylic showing good adhesive properties including initial and long term adhesion with excellent shear resistance. The adhesive exhibits good plasticiser resistance when bonded to a variety of plasticised substrates and is optimised for ageing resistance and especially useful where good heat resistance is required.

Support	Non-woven, 12 g/m <sup>2</sup>
Interliner	Release paper, yellow, 90g/m <sup>2</sup>
Adhesive Weight	90 g/m <sup>2</sup>
Total Thickness	0.10mm
Temperature Resistance	from -40°C to +200°C <i>according to the ATP test method AA-B-12-07</i>
Adhesive Strength	min 13 N/25mm <i>(According to AFERA 5001) Contact time: 1hr</i>

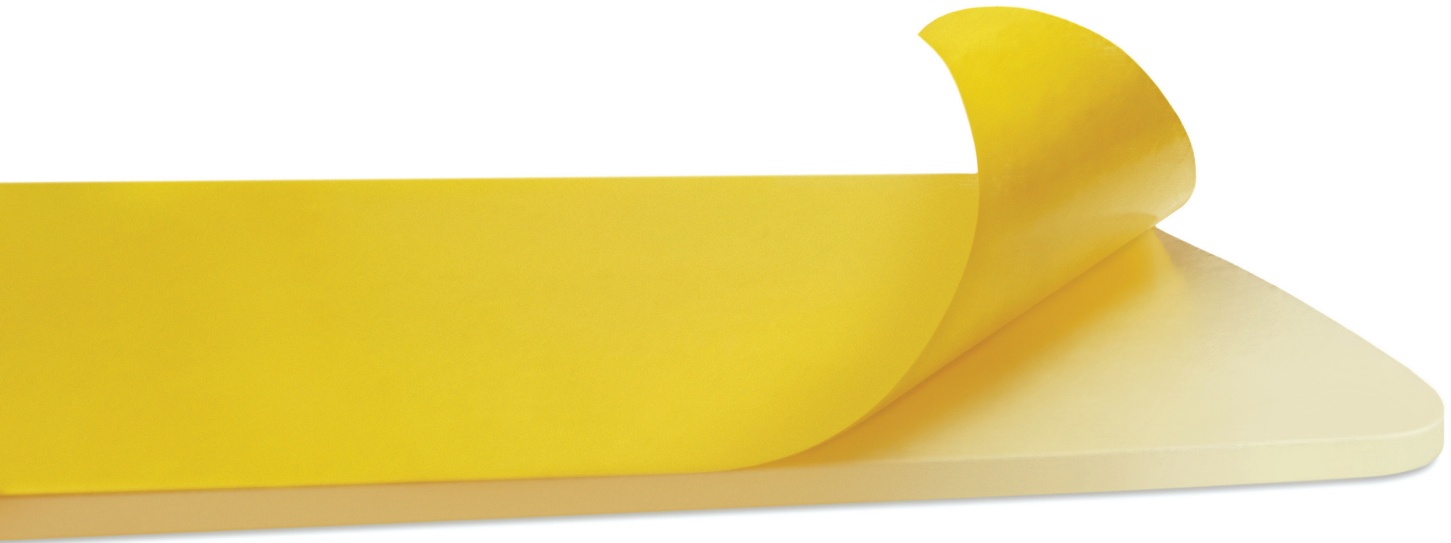

**Dimensional Tolerances:** are typically class 3 as standard, unless otherwise stated. Class 2 and Class 1 tolerances on request, in most instances.

**Disclaimer:** All recommendations and information contained in this specification sheet are to the best of our knowledge correct. Since conditions of service are beyond our control, users must satisfy themselves that the products are suitable for intended use. No warranty is given or implied in respect of information or recommendations or that any use of products will infringe rights belonging to other parties. In any event or occurrence our liability is limited to the invoice value of our goods delivered to you. We reserve the right to change product design and properties without notice.

**J-FLEX** Innovative Rubber Solutions

Units 1 & 2, London Road Business Park, Retford, Nottinghamshire, DN22 6HG, United Kingdom

tel: +44 (0) 1777 712400 fax: +44 (0) 1777 712409 email: sales@j-flex.com web: www.j-flex.com



Certificate No. RS 27920

